

# MINIPARTNER®- MP








### Pneumatic Manipulator MINIPARTNER MP with double cable

MINIPARTNER MP equipped with special gripping tools, allows to handle loads in a weightless condition in any direction. The gripping tool is connected to the balancing group by two singles cables to guarantee max safety. Mounted on a bridge crane with double runways, if offers an easy translation in order to cover a large working area.


## Minipartner overhead trolley mounted - MPS

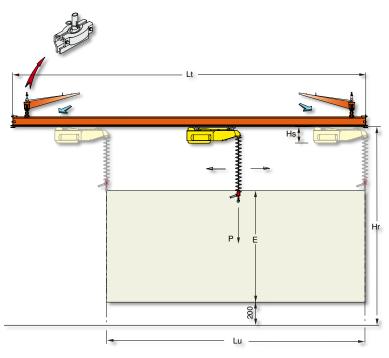

MINIPARTNER overhead trolley mounted "MPS"					
Max weight capacity	Р	80	Kg		
Bridge length	Lt	4000÷7000	mm		
Working length	Lu	3100÷6100	mm		
Vertical lift	E	1800	mm		
Overall dimension	Hs	320	mm		
Height under bridge	Hr	3100	mm		
Air supply	Dry and oil-free compressed air				
min constant 0.7÷0.8 MPa					

Configuration and measurements may change upon the Customer's specific requirements

# Minipartner Plus overhead trolley mounted - MPS

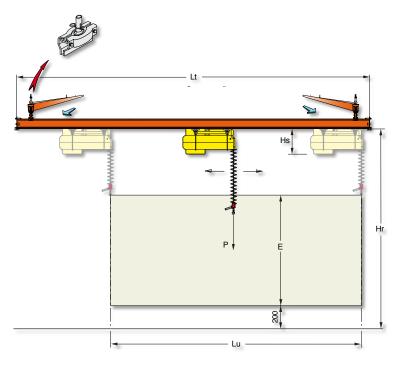

MINIPARTNER PLUS						
MODEL		PLUS 8	PLUS 6			
Max weight capacity	Р	170	220	Kg		
Bridge length	Lt	4000÷7000	4000÷7000	mm		
Working length	Lu	3250÷6250	3250÷6250	mm		
Vertical lift	Е	2000	1500	mm		
Overall dimension	Hs	435	435	mm		
Height under bridge	Hr	3150	2650	mm		
Air supply	Dry and oil-free compressed air min constant 0.7÷0.8 MPa					

Configuration and measurements may change upon the Customer's specific requirements



